



PSC

SUBMERSIBLE BATTERY CONTAINER



SENSORS



SYSTEM TECHNOLOGY




SOFTWARE



To be combined with DAC



Inter tidal monitoring

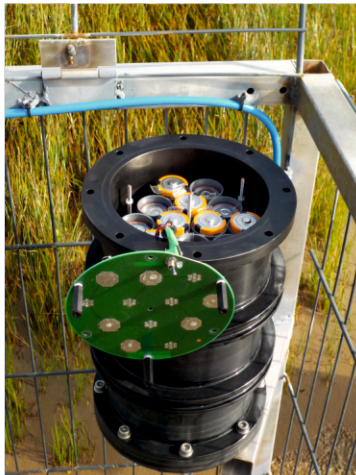

Replacing standard D-Cells

PSC

The PSC contains standard D-Cell batteries to power up oceanographic instruments. No special batterie brands are needed. a complete data acquisition system using the Campbell CR1000 plus GPRS modem (CDMA) incl. inside antenna and high efficient DC/DC converters. The container consist of a Delrin compound for shallow water, intertidal applications.

CR Basic monitoring programs can be supplied on request.

Specifications

- Dimensions: 380mm x 175mm diam.
- Weight: 4.5kg
- Material: POM, black
- Connectors: SubConn
- Input DC power: 10...40VDC, 1.5A max.
- Pressure: 10 bars
- Standard battery: D-Cell alkaline for 1 kwh capacity

Manager
Joerg R. Gutkuhn

Registry
District court Walsrode HRB 121846

Address
Goethestrasse 35
27721 Ritterhude, Germany
Phone: +49(0) 4292 9923-35, Fax: -65
E-mail: info@argusnet.de

Agent: